


## EDELBROCK NITROUS SYSTEMS SUPER VICTOR WITH E2 FOR 4-CYLINDER JET MAP CATALOG #71835 INSTALLATION INSTRUCTIONS

Please read both your DIRECT PORT INSTRUCTION MANUAL and this JET MAP insert before installing your Edelbrock Nitrous System. If you have any questions or comments, please feel free to contact our **Technical Hotline at: 1-800-416-8628** from 7a.m.-5p.m., Monday through Friday, Pacific Time or e-mail us at **Edelbrock@Edelbrock.com.** 

## **BILL OF MATERIALS**

Qty.	Description	Qty.	Description
<b>1</b>	Performer RPM Nitrous Solenoid	<b>4</b>	Red Tube Nuts
<b>1</b>	Performer RPM Fuel Solenoid	□ 8	Compression Fittings
<b>4</b>	Edelbrock E2 Nozzles	□ 2	Distribution Blocks
□ 8	3/16" Tubing	<b>□</b> 2	90° Union Fittings
□ 8	Tube Sleeves	<b>1</b>	6AN Nitrous Filter Fitting
<b>4</b>	Blue Tube Nuts	<b>1</b>	6AN Red Fuel Fitting
		□ 28	Various Jets

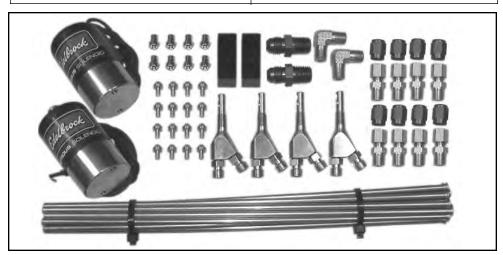

## **Jet Map**

<b>Approx. HP Gain</b>	Nitrous Jet	Fuel Jet	Sugg. Timing Retard
100 HP	26	22	1°-3°
150 HP	32	28	2°-4°
200 HP	38	34	3°-5°
250 HP	42	38	4°-6°

This jet map is based on a nitrous system with a flowing fuel pressure of 6.5 PSI. Any variations different that 6.5 PSI will change your jet map and potentially damage your engine. We highly recommend using the *Edelbrock Flow Test Tool (Catalog #76506)* to set your flowing fuel pressure.

**Edelbrock Corporation • 2700 California St. • Torrance • CA 90503** 

Tech Line: 800-416-8628 Office: 310-781-2222 E-Mail: Edelbrock@Edelbrock.com